


VESTAL PART NUMBER	AWG	WIRE DIAMETER (WD)	CENTER SPAN (F)	PART PITCH (P)	MAX OAH (Ho)	SEATING PLANE (H1)	FORM HEIGHT (H2)	INS LENGTH (IL)	HOLE PITCH (Po)	MATERIAL	PLATING	QTY PER 14" REEL
IR100-22-200 (R/W/B)	22	.025"	.100"	.500"	1.120"	.630"	N/A	.200"	.500"	SOLID COPPER	TIN	2500
IR100-22-250 (R/W/B)	22	.025"	.100"	.500"	1.120"	.630"	N/A	.250"	.500"	SOLID COPPER	TIN	2500
IR200-22-250 (R/W/B)	22	.025"	.200"	.500"	1.120"	.630"	.490"	.250"	.500"	SOLID COPPER	TIN	2500

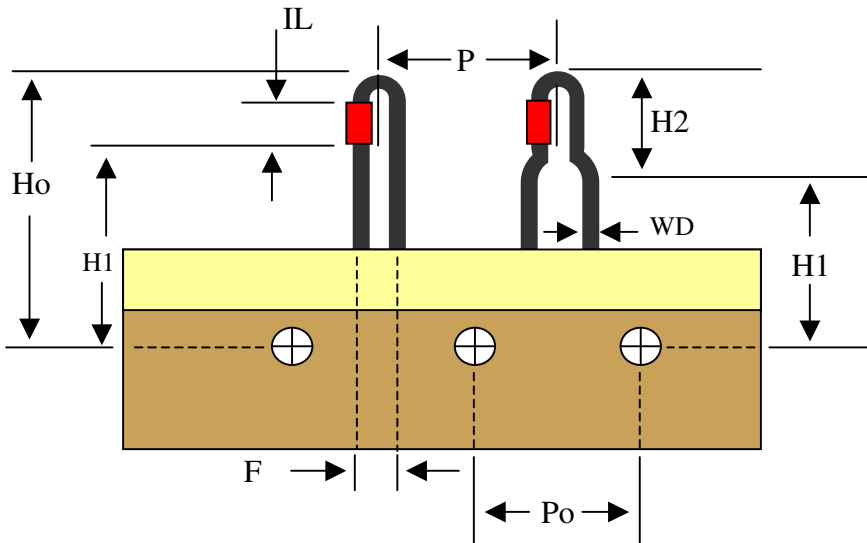

NOTES :

1. Irradiated PVC Insulation
2. Available insulation colors; red, white or blue
3. Maximum insulation diameter is .100"
4. All products are RoHS compliant
5. All taping dimensions and tolerances conform to EIA-468B unless otherwise noted
6. All wire meets ASTM-B33 for solderability

Title: Insulated Radial Jumper Wire  
Drawing No. VED005  
Rev: C  
Revision Date: 01.02.06  
Approval: WHK

**VESTAL**

Vestal Electronic Devices, LLC  
635 Dickson Street  
Endicott, NY 13760  
Phone: 607-773-8461 ~ Fax: 607-772-8184  
Email: vedsales@vestalelectronics.com