


Vestal Electronic Devices

Bare Wire Jumper Wire Data Sheet

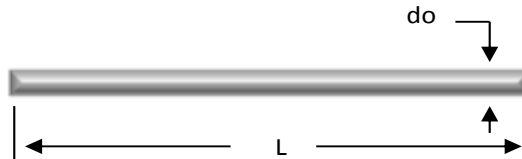

| Title | Wire Gauge (do) | Length (L) | Plating and Thickness | Packaging |
|----------------|--|----------------------------------|--|--------------------|
| BW | 22 | 400 | 25 | SMTR |
| BW = Bare Wire | 18 = .040" 20 = .032" 22 = .025" 24 = .020" 26 = .016" | 400 = .400" Customer Dictated | 25 = 25u" Sn (STD) * 300 = 300u" Sn ** 6040 = 300u" SnPb *** | Bag Box SMTR |

Conductor:

- Plated Solid Copper

Material Specifications:

- * ASTM-B33, RoHS, REACH and Conflict Mineral Free Compliant
- ** MIL-STD-202 Method 208, MIL-STD-1276 Type C, RoHS, REACH and Conflict Mineral Free Compliant
- *** MIL-STD-202 Method 208, MIL-STD-1276 Type C, Conflict Mineral Free Compliant

Packaging:

- Bulk in Bag
- Bulk in Box
- Surface Mount Tape & Reel(SMTR) to EIA-481

Contact factory for dimensional and or material options.

30-Jun-2015

Vestal Electronic Devices, LLC
607-773-8461
www.vestalelectronics.com