


Vestal

Electronic Devices

Surface Mount Jumper Wire Data Sheet

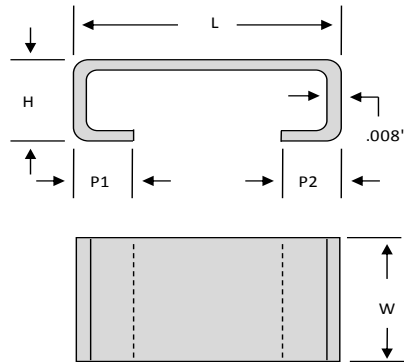

Part Number	Length (L)	Width (W)	Pad Length (P1/P2)	Height (H)	7" Reel Quantity
SMTJ-1206	.120"	.060"	.030"	.040"	3K
SMTJ-2004	.200"	.040"	.040"	.065"	2K
SMTJ-2006	.200"	.060"	.040"	.065"	2K
SMTJ-2010	.200"	.100"	.040"	.065"	1K
SMTJ-2506	.250"	.060"	.040"	.065"	2K
SMTJ-2510	.250"	.100"	.040"	.065"	1K
SMTJ-3510	.350"	.100"	.040"	.065"	1K
SMTJ-4006	.400"	.060"	.040"	.065"	2K

Conductor:

- 75u" Tin Plated Solid Copper

Material Specifications:

* ASTM-B33, RoHS, REACH and Conflict Mineral Free Compliant

Packaging:

- Surface Mount Tape and Reel to EIA-481 Standard

Operating Temperature: -55C to +200C

Contact factory for dimensional and or material options.

30-Sep-2015

Vestal Electronic Devices, LLC

607-773-8461

www.vestalelectronics.com